

PolyMide™ PA6-GF

PolyMide™ PA6-GF is a glass fiber reinforced PA6 (Nylon 6) filament. The material exhibits excellent thermal and mechanical properties without sacrificing the layer adhesion.

Physical Properties

| Property | Testing method | Typical value |
|------------------------------|---------------------------------|------------------------------------|
| Density | ASTM D792 (ISO 1183, GB/T 1033) | 1.2 (g/cm ³ at 21.5 °C) |
| Glass transition temperature | DSC, 10 °C/min | 75 (°C) |
| Melt index | 300 °C, 2.16 kg | 15.9 (g/10 min) |
| Melting temperature | DSC, 10 °C/min | 215 (°C) |
| Crystallization temperature | DSC, 10 °C/min | 174 (°C) |
| Heat Deflection Temperature | ISO 75 1.8 MPa | 124 (°C) |
| Heat Deflection Temperature | ISO 75 0.45 MPa | 191 (°C) |

Tested with 3D printed specimen of 100% infill

Mechanical Properties (Dry State)

| Property | Testing method | Typical value |
|------------------------------|--------------------------------|---------------------------------|
| Young's modulus (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 4431 ± 184 (MPa) |
| Young's modulus (Z) | ASTM D638 (ISO 527, GB/T 1040) | 3330 ± 145 (MPa) |
| Tensile strength (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 84.5 ± 2.1 (MPa) |
| Tensile strength (Z) | ASTM D638 (ISO 527, GB/T 1040) | 61.4 ± 3.9 (MPa) |
| Elongation at break (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 3.4 ± 0.3 (%) |
| Elongation at break (Z) | ASTM D638 (ISO 527, GB/T 1040) | 2.9 ± 0.7 (%) |
| Bending modulus (X-Y) | ASTMD790 (ISO 178, GB/T 9341) | 4637 ± 293 (MPa) |
| Bending strength (X-Y) | ASTMD790 (ISO 178, GB/T 9341) | 136.4 ± 1.6 (MPa) |
| Charpy impact strength (X-Y) | ASTM D256 (ISO 179, GB/T 1043) | 16.5 ± 0.5 (kJ/m ²) |

All testing specimens were printed under the following conditions:

Nozzle temperature = 300 °C, printing speed = 45 mm/s, shell: 0.8mm, infill: 100%

All specimens were annealed at 80 °C for 30 min and dried for 48h prior to testing

Mechanical Properties (Moisture Conditioned)

| Property | Testing method | Typical value |
|------------------------------|--------------------------------|---------------------------------|
| Young's modulus (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 2050.3 ± 243.6 (MPa) |
| Young's modulus (Z) | ASTM D638 (ISO 527, GB/T 1040) | 2593 ± 192 (MPa) |
| Tensile strength (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 50.8 ± 4.9 (MPa) |
| Tensile strength (Z) | ASTM D638 (ISO 527, GB/T 1040) | 44.4 ± 4.7 (MPa) |
| Elongation at break (X-Y) | ASTM D638 (ISO 527, GB/T 1040) | 19.4 ± 2.2 (%) |
| Elongation at break (Z) | ASTM D638 (ISO 527, GB/T 1040) | 2.9 ± 0.8 (%) |
| Bending modulus (X-Y) | ASTMD790 (ISO 178, GB/T 9341) | 2232 ± 97 (MPa) |
| Bending strength (X-Y) | ASTMD790 (ISO 178, GB/T 9341) | 65.1 ± 2.2 (MPa) |
| Charpy impact strength (X-Y) | ASTM D256 (ISO 179, GB/T 1043) | 21.2 ± 1.1 (kJ/m ²) |


All specimens were annealed at 80 °C for 24h, and conditioned at 70% RH/23 °C and ambient temperature for 15 days prior to testing

Recommended printing conditions



| Parameter | |
|---------------------------------------|--|
| Nozzle temperature | 280 - 300 (°C) |
| Build Surface material | Glass, Garolite, Magigoo PA |
| Build surface treatment | Applying PVA glue to the build surface |
| Build plate temperature | 25 - 50 (°C) |
| Cooling fan | Turned off |
| Printing speed | 60 (mm/s) |
| Raft separation distance | 0.1 - 0.2 (mm) |
| Retraction distance | 3 - 6 (mm) |
| Retraction speed | 40 - 60 (mm/s) |
| Recommended environmental temperature | 25 - 50 (°C) |
| Threshold overhang angle | 45 (°) |
| Recommended support material | PolyDissolve™ S1 |

Based on 0.4 mm nozzle and Simplify 3D v.3.1. Printing conditions may vary with different nozzle diameters



- Abrasion of the copper nozzle happens quite often when printing PolyMide™ PA6-GF. Normally, the life of a copper nozzle would be approximately 9h. A wear-resistance nozzle, such as hardened steel and ruby nozzle, is highly recommended to be used with PolyMide™ PA6-GF.
- PolyMide™ PA6-GF is sensitive to moisture and should always be stored and used under dry conditions (relative humidity below 20%).
- If PolyMide™ PA6-GF is used as the support material for itself, please remove the support structure before excessive moisture absorption. Otherwise the support structure can be permanently bonded to the model.
- After the printing process, it is recommended to anneal the model in the oven at 80 - 100°C for 1 - 3 hours.

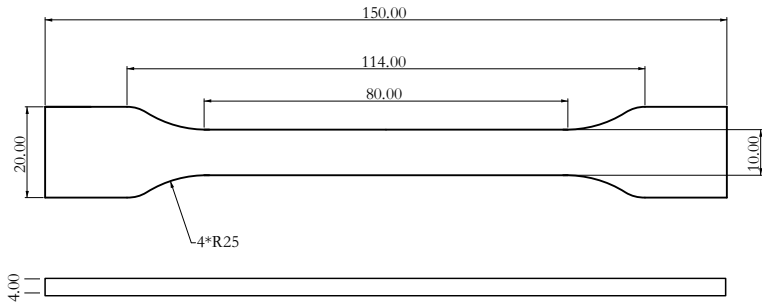


Tensile testing specimen; ASTM D638 (ISO 527, GB/T 1040)

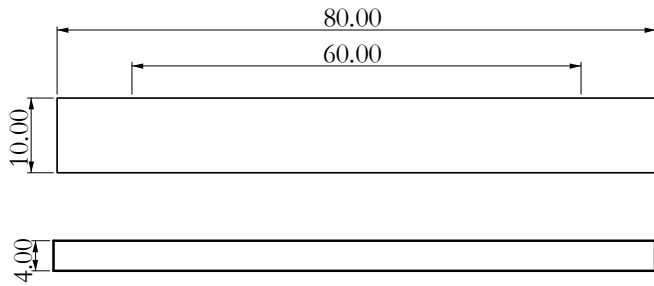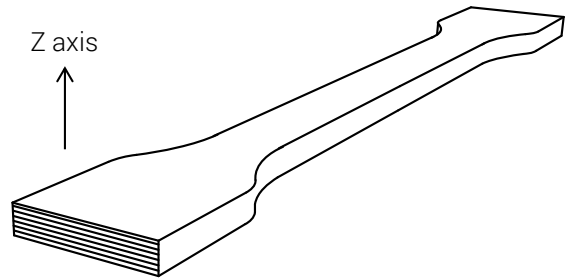

Flexural testing specimen; ASTM D790 (ISO 178, GB/T 9341)

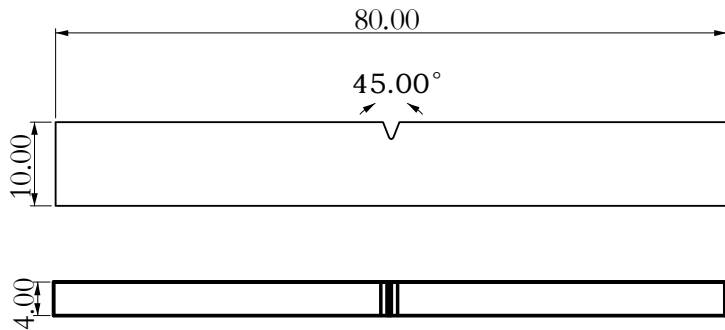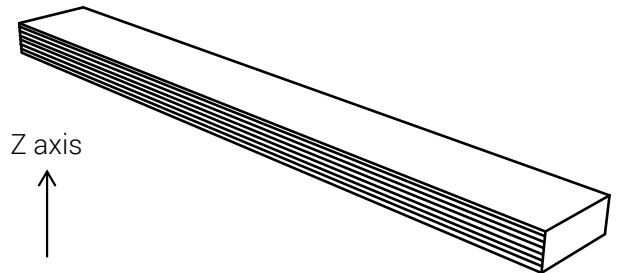

Impact testing specimen; ASTM D256 (ISO 179, GB/T 1043)

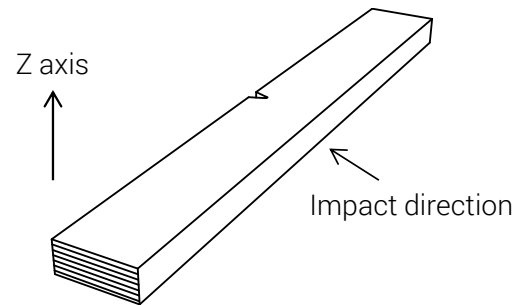

Disclaimer:

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. End-use performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, etc. Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/recycling practices of Polymaker materials for the intended application. Polymaker makes no warranty of any kind, unless announced separately, to the fitness for any use or application. Polymaker shall not be made liable for any damage, injury or loss induced from the use of Polymaker materials in any application.